

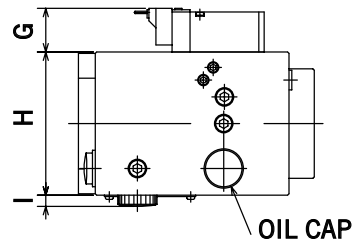


AIR BOOSTERS KITAGAWA NC ROTARY TABLES

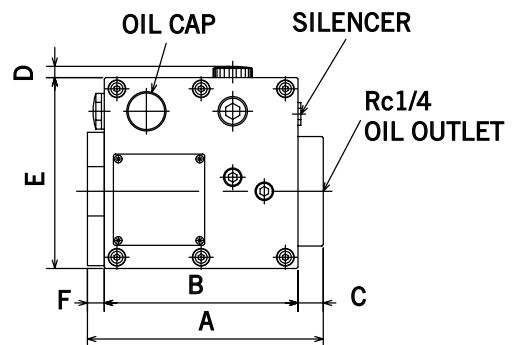

Rc1/4 AIR INLET FOR CLAMPING
SOLENOID VALVE OIL GAUGE



MODEL	NC ROTARY TABLE	AIR PRESSURE (PSI)	MULTIPLE APPLICATION RATIO	HYDRAULIC PRESSURE (PSI)	RECOMMENDED OIL	WEIGHT (LB.)
AB25T	TT251, 321	57-71	1:8	464-580	TURBINE #32	11
AB50T	TR401, 500, 630					13

MODEL	A	B	C	D	E	F	G	H	I	J	K
AB25T	6.61	5.43	.71	.31	5.35	.47	1.26	4.02	.31	6-M5	.31
AB50T	9.88	6.65	2.76	.31	5.35	.47	1.26	4.02	.31	6-M5	.31

Note: The positions of oil cap and oil gauge can be reversed.

Note: When AB is installed on NC ROTARY TABLE, oil cap must be placed on the top.

Note: Specify AC100V or DC24V for solenoid valve when ordering.